

4000 Generation Moduler

Analog Output Modul type 4X79



Unikke Fordele


- Udviklet og produceret i Danmark
- Analog 4-20mA eller 0-10Vdc AKTIVT output
- Digital EtherNet interface
- For ATEX og non-ATEX applikationer
- 6-cifret LED display
- 2 digitale indgange + 2 digitale udgange
- Vejemodul for op til 4 digitale vejeceller
- Viser belastningen individuelt for hver enkelt vejecelle
- Viser summen af belastningen på alle vejecellerne
- Konfigurerbar måleperiode (20ms -> 4sek)
- 16bit D/A converter
- Opsætning via DIP-switches
- Ved ATEX installation skal modulet forsynes af Eilersen ATEX strømforsyning type 4051A
- Bemærk at ATEX strømforsyningen type 4051A og modul type 4X79 skal installeres uden for det farlige område ved ATEX installationer
- Plug-and-play installation med Eilersen digitale vejeceller
- Indgang for nulstilling og tarering
- En "digital junction box", som kan monteres i nærheden af vejecellerne eller i en tavle
- Kundetilpasset applikationssoftware kan leveres efter forespørgsel

Specifikationer

Parameter	Unit	Data
Input		Up to 4 digital load cells
Output		Analog 4-20mA or 0-10Vdc Digital EtherNet interface
Power Supply	Vdc	24Vdc \pm 10%, min. 2A
ATEX: Safe Power Supply		ATEX certified power supply type 4051A
Operating temperature range	$^{\circ}$ C	-20 to +50
Weight	kg	0.7
Housing		Anodized Aluminium
Mounting		Mounting base or DIN rail



Dimensioner (mm)

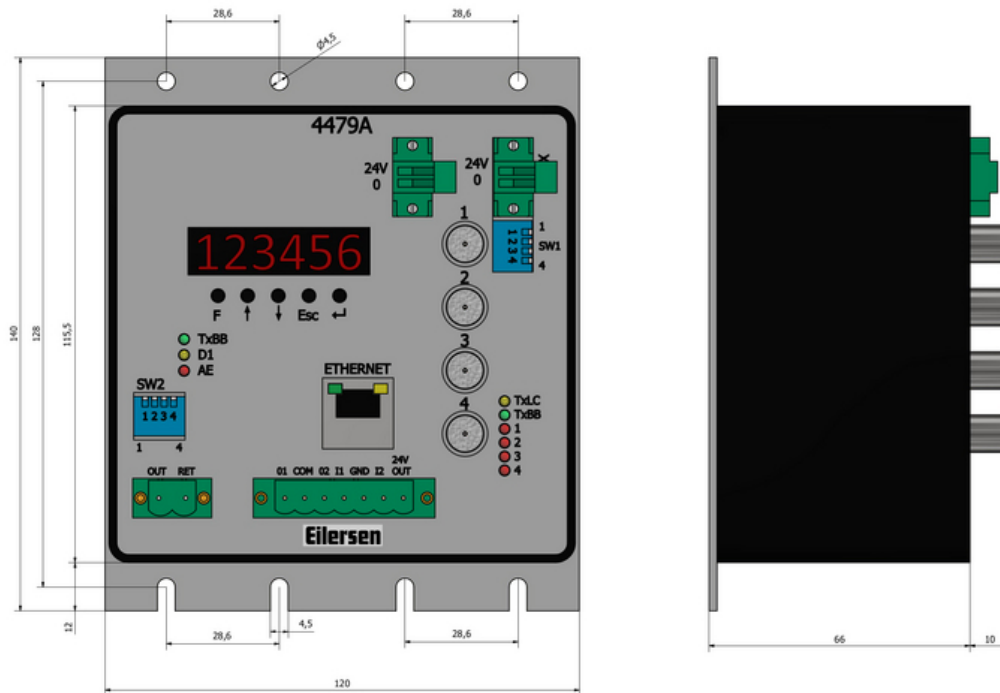

Optioner

- Forberedt for tavlemontering på DIN-skinne
- Monteret i rustfri kasse
- Kundetilpasset applikationssoftware

Dokumentation

Disclaimer and Legal Information: The information on this web site is provided in connection with products supplied by Eilersen Electric A/S and affiliated companies ("Eilersen"). No license, expressed or implied, to any intellectual property rights is granted by this information or any documents on the web site. Eilersen assumes no liability and disclaims any expressed or implied warranty, relating to sale and/or use of Eilersen products including liability or warranties relating to fitness for a particular purpose. The information on this web site is provided as a service and for information purpose only and is subject to change without prior notice. Eilersen assumes no responsibility or liability whatsoever for any errors or inaccuracies that may appear on this web site. Eilersen is not responsible for any loss of hardware, software or files, caused by the use of the web site or elements downloaded or used from/on the web site. Hence Eilersen makes no warranty, that the web site or product or services provided on the web site (including free software downloads) will meet your requirements or will be uninterrupted, timely, secure or without errors, or that the web site or the servers used by Eilersen are free of viruses or bugs or are fully functional or accurate.